

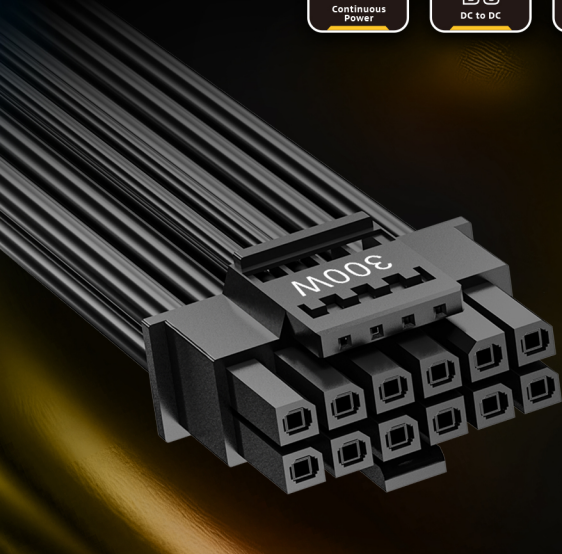




CSK DC to DC

750W

Antec's new generation CSK DC to DC power supply is crafted for quality, efficiency, and performance. Featuring DC-to-DC architecture, 80 PLUS® BRONZE certification, and quiet 120mm fans, the brand-new CSK750 DC to DC includes Antec's solid 5-year warranty. The CircuitShield™ suite of industrial-grade protections ensure that the power delivered to your system is safe and reliable in any environment.



PCI-E 5.1 READY

The new CSK750 DC to DC meets high standards for reliability and power efficiency, ensuring the utmost level of quality and performance. The included PCIe 5.1 / 12V-2x6 GPU cable enables seamless compatibility with the latest graphics cards.



80 PLUS® BRONZE CERTIFIED

Delivering up to 88% efficiency, CSK750 DC to DC utilizes active PFC and gives you a cooler and quieter system, all powered by Continuous Power.

CIRCUITSHIELD™



The full suite of industrial-grade protections includes OCP, OVP, UVP, SCP, OPP, OTP, SIP, and NLO, ensuring the safety and reliability of your power supply in any situation.



5-YEAR WARRANTY

Antec commits a 5-year warranty and offers our quality tech support and customer service.



120MM SILENT FAN

The whisper-quiet 120mm fan provides high airflow with the durability and longevity that is a Antec signature.


THERMAL MANAGER

Thermal Manager, an advanced low voltage fan control for optimal heat & noise management, allows your PSU to stay at the optimal temperature



COMPACT SIZE

Compared to large power supplies on the market, it is smaller in size and can be used with a wider range of computer cases.

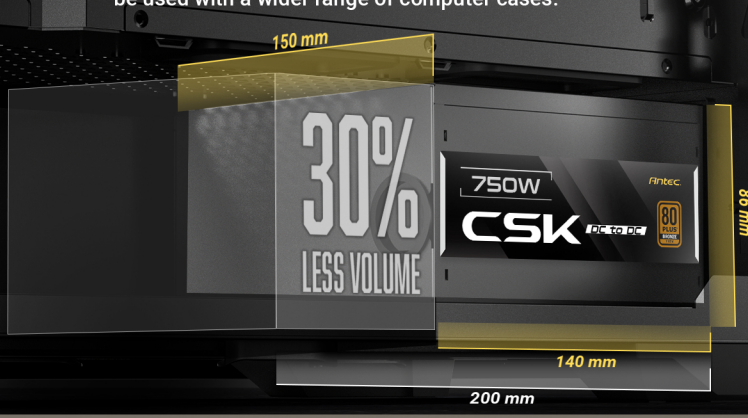

CABLES

QTY	Cable Length	Cable Type	Connctor(s) Per Cable	Total Connectors
1	600 mm	24(20+4)pin M/B	1	1
1	600 mm	16(12+4)pin PCI-E 5.1 12V-2x6 (300W)	1	1
1	650 mm 150 mm	8(4+4)pin CPU	2	2
2	550 mm 150 mm	8(6+2)pin PCI-E	2	4
2	500 mm 150 mm 150 mm	SATA	3	6
1	500 mm 150 mm 150 mm	Molex	3	3

CONNECTORS

24-pin M/B Connectors	16-pin PCI-E 5.1 12V-2x6	8(4+4)pin CPU Connectors	8(6+2)pin PCI-E Connectors	SATA Connectors	Molex Connectors
x1	x1	x2	x4	x6	x3

INPUT

100-240V~, 50Hz-60Hz, 12A Max

OUTPUT

+3.3V	+5V	+12V	-12V	+5VSB
18A	18A	62.5A	0.3A	2.5A
100W		750W	3.6W	12.5W
750W				

SPECIFICATIONS

Model	CSK750DC
Safe Model	X5000A537XC-24
Type	ATX 12V 2.52
Dimension	140(L)*150(W)*86(H)
Modular	Non-Modular
Warranty	5 years
Input Voltage	100V-240V
Input Current	12A Max
Input Frequency Range	50Hz-60Hz
PFC	Active PFC
Power Good Signal	100-500ms
Protection	OCP, OVP, UVP, SCP, OPP, OTP, SIP, NLO
Output Capacity	750W
Operation Temperature	0-40°C
Regulatory	cTUVus/TUV/CB/RCM/CE/FCC/BSMI/KC/UKCA/ICES/BIS
Fan	120mm Silent Fan
Certifications	80 Plus Bronze
Connector	1 x 24(20+4)pin MB 1 x 16(12+4)pin PCI-E 5.1 / 12V-2x6 / 300W 2 x 8(4+4)pin CPU 4 x 8(6+2)pin PCI-E 6 x SATA 3 x Molex
Unit Box Dimensions	255mm(L)*195mm(W)*100mm(H)
Shipping Box Dimensions	545mm(L)*425mm(W)*230mm(H)
Net Weight	1.80KG
Gross Weight	2.00KG
UPC#	0-761345-20115-5 CSK750DC US 0-761345-20114-8 CSK750DC JP 0-761345-20113-1 CSK750DC GB 0-761345-20112-4 CSK750DC EC 0-761345-20111-7 CSK750DC AU