

# PMT-15-4K

Portable Touchscreen Monitor  
15.6" 4K with Metal Housing




Screen size 15.6"



10 Point touch



Ultra HD 4K



16.7 Million colours

## Touchscreen control with Ultra HD 4K resolution

The Verbatim Portable Touchscreen 4K Monitor gives you an extra dimension for your work and play. You can use it as a second screen for your laptop when you are travelling or giving one-on-one presentations, or to provide a large additional display for your phone, tablet, or portable gaming system\*.

Delivering 16.7M colours in Ultra HD 4K, the Verbatim 4K Portable Monitor utilizes in-plane switching technology (IPS) to produce a sharper and more accurate picture and wide viewing angle. The display incorporates high-dynamic range (HDR) technology which improves picture quality giving the image more "depth" and creating a fantastic viewing experience.

It's the ideal solution to help you overcome one-screen limitations outside the office, extending your visual experience, anytime and anywhere.

\* Ensure your device has a USB-C port supporting DisplayPort Alt Mode and power delivery.

# PMT-15-4K

## Portable Touchscreen Monitor 15.6" 4K with Metal Housing

<b>General Information</b>	
Approx. product dimensions WxHxD	357.10 x 215 x 6/12mm (Min/Max)
Product weight	1 230 grams approx
Material	Panel: a-Si TFT-LCD / Capacitive touch panel; Monitor casing: Aluminium; Sleeve: Neoprene
Colour	Black
Tilt	0° to 85° tilt
<b>Display</b>	
Panel type	10-point multi-touch with G+G technology, IPS technology
Display size	15.6" LED-Backlight
Brightness (typical)	350 cd/m <sup>2</sup> (typical)
NTSC	72% NSTC
Contrast (typical)	1000:1 (typical)
Active area (mm)	344.16 × 193.59 mm (H×V)
Pixel pitch (mm)	0.05975 × 0.17925 mm (H×V)
Resolution (H x V)	3 840 x 2 160 pixel
Aspect ratio	16:9
Response time (typical)	Response time (typical GTG): 6ms Response time (typical Tr+Tf): 14+11 ms Response time (BtW): 10 ms
View angles LR,DU (CR>10)	H 178°/ V 178°(Min)
Panel surface	glare (AF=Anti-Fingerprint)
Display colours	16.7M colours
<b>PC Input Range</b>	
Vertical frequency	30 to 60Hz
Maximum display frequency	3 840 x 2 160 / 60Hz (Resolution H*V/Fv)
<b>Input/Output</b>	
USB-C1/2	2 x USB-C supporting DisplayPort Alt Mode
HDMI	1 x Standard HDMI (1.4)
USB-A	1 x USB-A 2.0 (only Output)
Earphone	1 x 3.5 mm Audio jack (only Output)
Speaker (typical )	2 x 1W (8Ω)
<b>Power</b>	
Power via	USB-C or optional power supply 5V3A
Consumption (typical)	On: ≤20W; Standby≤0.5W, Off≤0.5W
PD power	PD 5V3A (15W), 9V3A (27W), 12V3A (36W), 15V3A (45W), max. 20V 3.25A (65W)
Power mode indicator light	Power on: BLUE (LED) / Power saving: RED (LED)
Battery	N/A
<b>Controls</b>	
Physical controls	Power & Menu button; Up button (+), Down button (-) + Touch screen
On screen display	Picture adjust, Colour adjust, Mode adjust, Other settings (Signal source selection, FreeSync, Reset), Exit Menu
Colour temperature	9300K / 6500K / SRGB / User Mode (default 7500K)
Preset mode	Standard, Game, Movie, Photo, Scenery, HDR Auto, DCR

# PMT-15-4K

## Portable Touchscreen Monitor 15.6" 4K with Metal Housing

Touch	
Touch screen	Capacitive touch panel
Multi touch	10 Points
Touch panel	G+G

Other Features	
Stand	Built-in kickstand, Tilt: from 0° up to 85°
Supported technology	IPS; HDR; FreeSync; Low blue light
EU energy class	A

Storage and Operating Conditions	
Storage temperature	-20°C to 60°C
Operating temperature	0°C to 40°C
Operating humidity	20% to 85% RH non-condensing

Compliance	
EC declaration of conformity	The products here listed are in compliance with the requirements set out in the Council directive on the Approximation of the Laws of the Member States.
Electromagnetic compatibility	2014/30/EC
Low voltage protection	2014/35/EC
RoHS directive	2011/65/EC
Directives	Electromagnetic Compatibility: 2014/30/EC Low Voltage Protection: 2014/35/EC RoHS Directive: 2011/65/EC Annex II: 2015/863/EC Test standards: EN 55032:2015+A11:2020+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2021+A2:2021, IEC 62368-1:2018, EN IEC 62368-1:2020+A11:2020

PN	Description	Bar Code	EAN128 Code	EAN14 Code
32238	Verbatim PMT-15-4K Portable Touchscreen Monitor 15.6" 4K Metal Housing	023942322382	(02)00023942322382(37)02(91)491 (02)00023942322382(37)06(91)491	20023942322386 50023942322387

Logistic Information	
Pack dimensions LxWxH	280 x 466 x 58 mm
Pack weight	2 540 g
Pcs per pack	1
Inner cartons dimensions LxWxH	482 x 132 x 300 mm
Inner cartons weight	5 480 g
Pack per Inner Carton	2
Outer cartons dimensions LxWxH	500 x 430 x 330 mm
Outer cartons weight	17 340 g
Pcs per outer carton	6
Outer cartons per layer	4 Layers x 4 Outer Cartons + 3 Layers x 2 Outer Cartons
Layers per pallet	7 (4+3)
Outer Carton per pallet	22
Pcs per pallet	132



# PMT-15-4K

## Portable Touchscreen Monitor 15.6" 4K with Metal Housing



Technology you can trust



Front



Angled



Left side



Back angled



Pack content



Angled with background



Monitor with laptop




Monitor with tablet



Monitor with smartphone



Neoprene sleeve

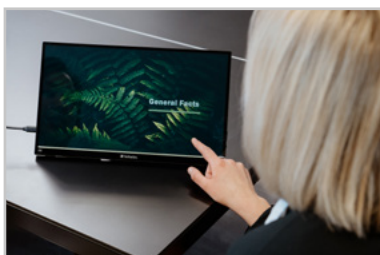

Lifestyle 1



Lifestyle 2

### Pack Contents:

- Verbatim PMT-15-4K Portable Touchscreen Monitor 15.6" 4K Metal Housing
- 2x USB-C to USB-C cable 1.0m
- HDMI-HDMI cable 1.5m
- EU power supply with UK adapter (PD up to 33W)
- Neoprene protection leeve
- Quick start guide

### System Requirements

- Interface:
    - HDMI (power supply required, included)
    - USB-C supporting DisplayPort Alt Mode
  - OS Compatibility:
    - Android OS, Windows 11/10/8
    - Mac OS, iOS (adapter required for Lightning devices, not included.
- Touchscreen function not supported by iOS/iPadOS)

### Warranty

- 2 year limited warranty

For more information, please contact your key account manager

Publication date: 23-04-2024  
© 2024 Verbatim. All rights reserved.  
All brand names are registered trademarks of their respective owners.  
Unauthorized use strictly prohibited.  
Specifications are subject to change without prior notice.