
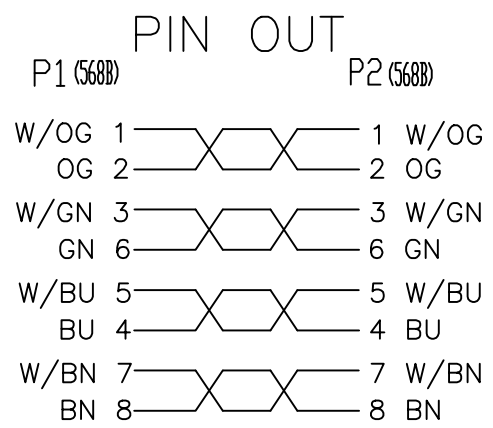


P/N:

LENGTH	TOLERANCE
0.25M	±15MM
0.5M	±20MM
0.7M	±20MM
1M	±20MM
1.5M	±30MM
2M	±30MM
3M	±45MM
4M	±60MM
5M	±75MM
7M	±100MM
10M	±150MM
15M	±200MM
20M	±250MM
25M	±300MM
30M	±350MM
50M	±750MM

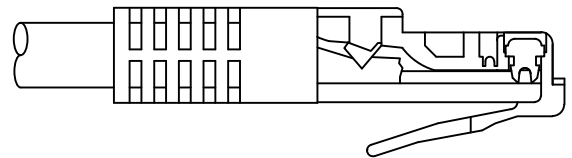

NOTES:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 20MΩ(Min)
Conduction resistance 3Ω(Max)

③	OUTER MOLDED	75P PVC,THE COLOR ACCORDING TO CABLE COLOR	0.048	KG
②	CONNECTOR	UTP CAT.6 8P8C,TRANSPARENT,PIN GOLD PLATED FU",	2	PCS
①	CABLE	UTP CAT.6,1P(7/0.15CCA)*4C+CROSS,JACKET:GREY PVC,OD:6.0±0.2MM.	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY	Checked by NIKE	Approved by - date Feb 22.2018	File name UTP CAT.6	Date Feb 22.2018	Scale FREE
ANGLE:				UTP CAT.6 8P8C-8P8C	
UNIT:MM				UTP CAT6	Edition 1