HIGH-END INDUSTRIAL MADE

Antec
TRANQUIL 12025
Antec

TRANQUIL

120 ARGB PWM FAN

TRANQUIL 12025
Antec

TRANQUIL & POWERFUL

Unique fan blade and frame design offers powerful airflow with low noise accomplished.

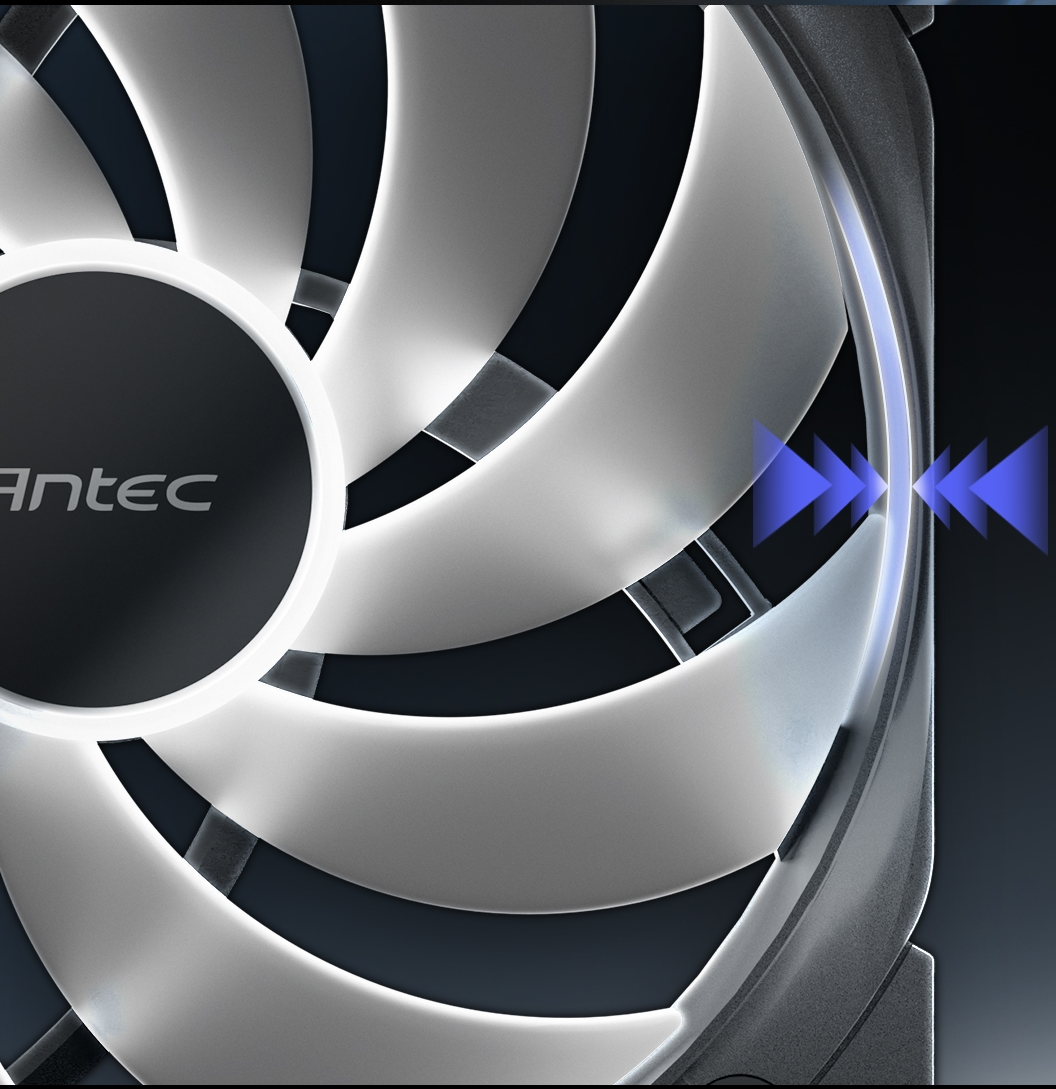

EXQUISITE CRAFTSMANSHIP

Minimal clearance between fan frame and blades, achieving maximum operational efficiency.

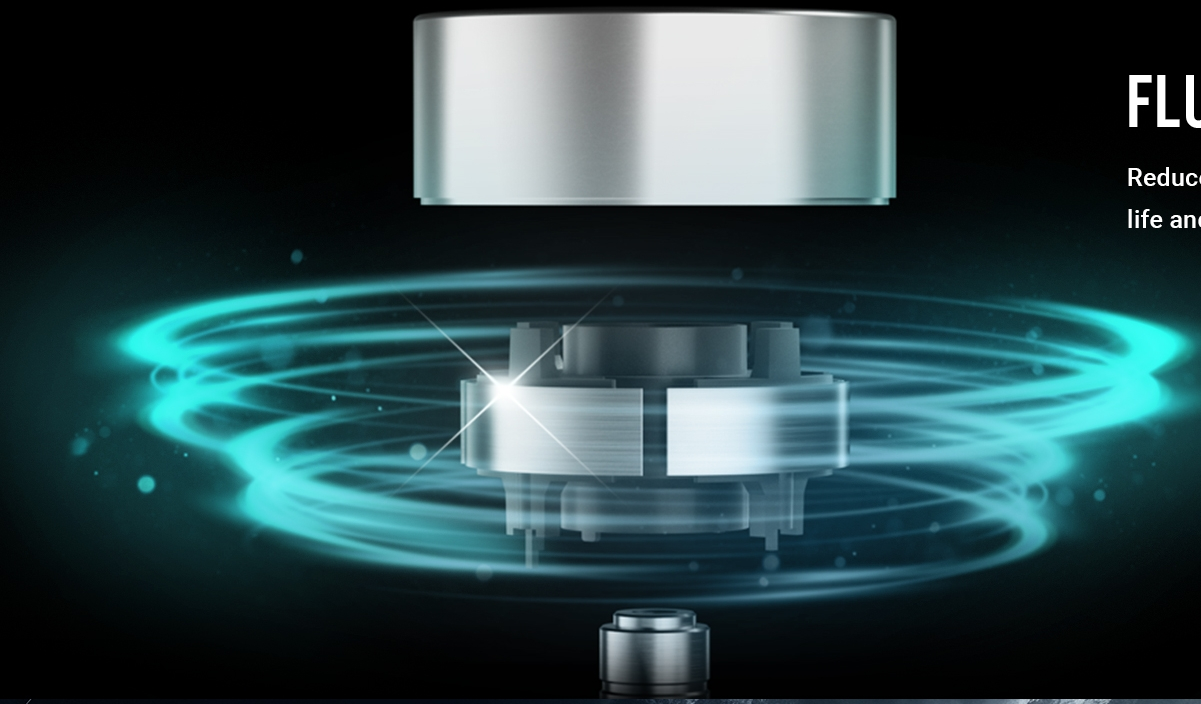

FLUID DYNAMIC BEARING

Reduces friction between shaft and bearing for longer life and minimal noise.

VIBRATION-ABSORBING & ANTI-NOISE PADS

Equipped with eight damping feet to prevent resonance, reducing noise effectively.

EMINENT COOLING PERFORMANCE

Airflow	Air Pressure	Noise Level
64.02 CFM	2.45 mmH₂O	26.9 dB(A)

ARGB & PWM FAN CONTROLLER INSTALLATION

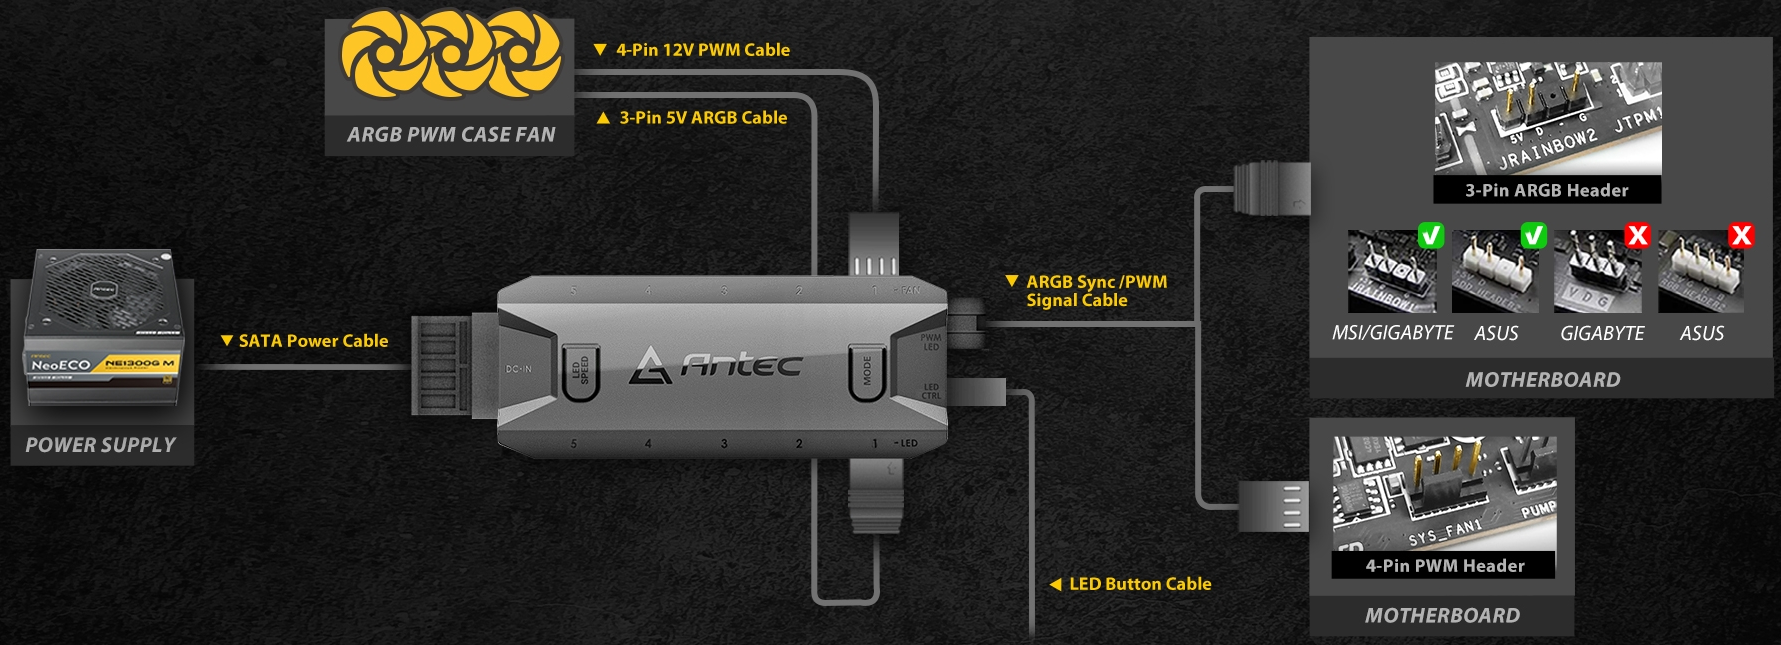
ARGB PWM CASE FAN
▼ 4-Pin 12V PWM Cable
▲ 3-Pin 5V ARGB Cable
POWER SUPPLY
NeoECO
NE1300G M
▼ SATA Power Cable
DC-IN
LED SPEED
Antec
MODE
5 4 3 2 1 - FAN
5 4 3 2 1 - LED
PWM LED
LED CTRL
▼ ARGB Sync /PWM Signal Cable
◀ LED Button Cable
3-Pin ARGB Header
JRAINBOW2
JTPM1
✓ MSI/GIGABYTE
✓ ASUS
✗ GIGABYTE
✗ ASUS
MOTHERBOARD
4-Pin PWM Header
SYS_FAN1
PUMP
MOTHERBOARD

CABLE & CONNECTOR

3-Pin 5V ARGB Cable
Cable Length: 500 mm

4-Pin 12V PWM Cable
Cable Length: 500 mm

Durable Woven Wire
Covered with durable wovenwire to enhance the lifetime & create unique aesthetics.

PACKAGE

Tranquil 120 ARGB

Tranquil 120 ARGB 3-in-1 Pack with Controller

SPECIFICATION

Fan Type	ARGB PWM Fan
Dimensions	120*120*25 mm
Bearing Type	FDB Bearing
LED Type	Addressable RGB
Fan Speed	400±100~2000±150 RPM

Airflow	64.02 CFM
Air Pressure	2.45 mmH_2O
Fan Noise Level	26.9 dB(A)
Lifespan	50,000 / hrs 25°C
Connector	Fan : 4-pin(PWM) | LED : 3-pin
Rated Voltage	Fan : DC 12 V | LED : DC 5 V
Operation Voltage	Fan : DC 7.0 ~ 13.8 V | LED : DC 4.0 ~ 5.5 V
Rated Current	Fan : ≤ 0.20 A | LED : ≤ 0.30 A
Warranty	2 years
UPC#	0-761345-40041-1 TQ 12025 ARGB 0-761345-40032-9 TQ 12025 ARGB_3PK

Antec